


# **Belt-Way** Conveyor Belt Scales for Every Application

The **Belt-Way Serial Remote Display** is housed in a Nema 4X enclosure. The 4 line by 20-character Liquid Crystal Display provides WEIGHT, RATE (in tons per hour), BELT SPEED, and dynamic percentage of LOAD CELL CAPACITY for one scale.

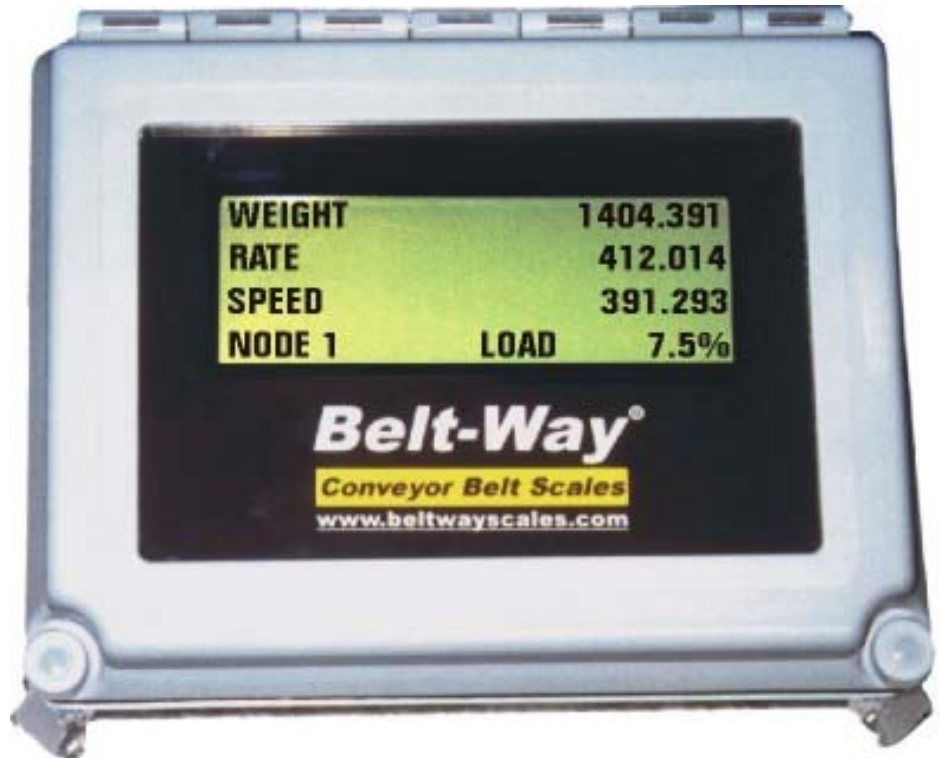

## **Packages includes:**

1-Serial Remote Display  
1-5VDC 1 Amp Power Supply

## **Connection of the Remote Display Requires:**

### **Hard Wire**

\***CBL0003**---2 Individually Shielded Twisted Pair Cable. Maximum cable length is 50 ft. RS-232 to RS-485 Converter required for greater distances. (This cable is available per foot, or in 1000 foot spools.)

### **Wireless**

\***RS-232 Radio-link** – Requires Line of Sight between antennas. Range of up to 14 miles available.

The LCD Remote Display is in stock and available for immediate shipment.